

SEACHROME

SEACHROME CORPORATION

Phone: (800) 955-2476

Fax: (800) 444-3380

www.seachrome.com

Description:

SCAL-122


Wall-Mount Liquid Soap Dispenser

Customer:

Customer Part #

05-29-2012

This drawing and the information contained herein is proprietary to Seachrome Corp. and shall not be reproduced, copied or disclosed in whole, or part, or used for manufacturing or for any other purpose without the written permission of Seachrome Corporation.

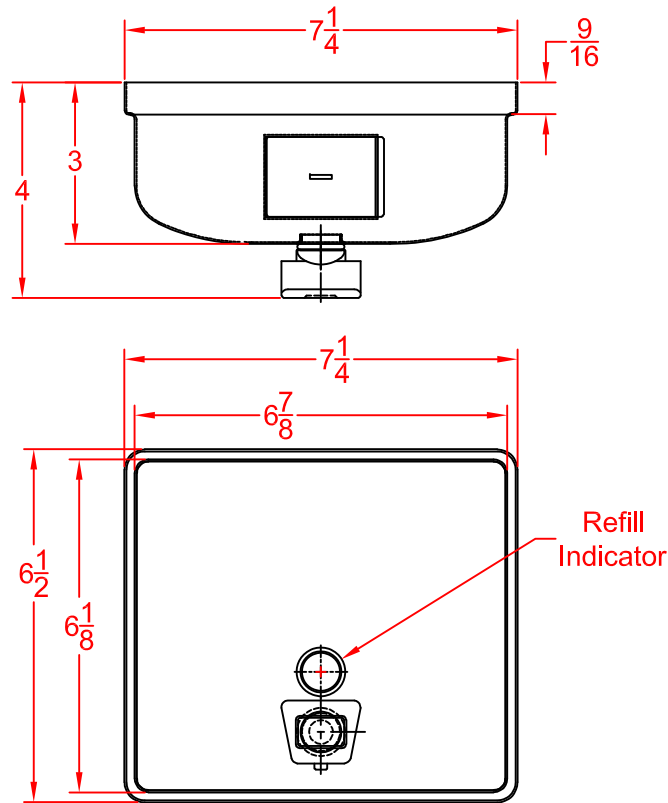

SCAL-122

#304 Satin Stainless Steel

Overall: $7\frac{1}{4}$ " W x $6\frac{1}{2}$ " H x 4" D

Capacity: 50 Ounces

SEACHROME

SEACHROME CORPORATION

Phone: (800) 955-2476

Fax: (800) 444-3380

www.seachrome.com

Description:


SCAL-122

Wall-Mount Liquid Soap Dispenser

Customer:

Customer Part #

05-29-2012

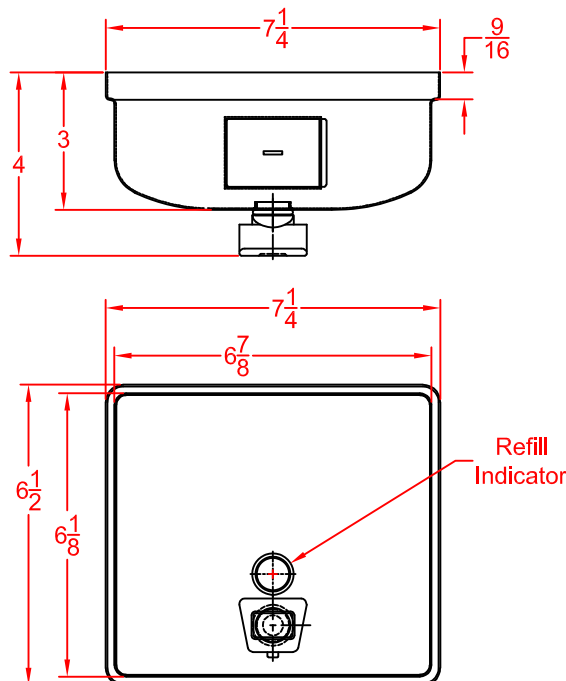

SCAL-122

Specifications:

SOAP TANK: Fabricated of 20ga. Stainless Steel, #4 satin finish, fully welded one-piece construction.

VALVE: All purpose antibacterial soap valve cylinder, black molded plastic push style valve that takes less than 5 lbs of force and one hand to operate.

VIEWER: Clear plastic window allows a constant fluid level check.

CONCEALED MOUNTING PLATE: Fabricated of heavy gauge stainless steel.


FILLER CAP: Fabricated of stainless steel, hinged to allow easy servicing, secured with special key that creates a vandal resistant dispenser.

OVERALL SIZE: $7\frac{1}{4}$ " W x $6\frac{1}{2}$ " H x 4" (wall to valve).

CAPACITY: 50 ounces

Installation:

Provide an area on mounting surface at desired or specified location. Secure concealed mounting plate to wall surface with proper fasteners. Slide dispenser down over mounting plate and secure by means of set screw located inside tank. Fill unit with proper soap. Close lid and secure with special key. Test valve for proper operation.

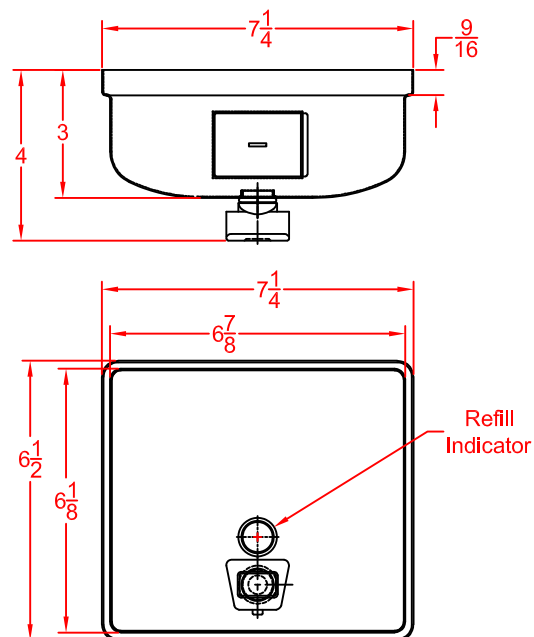

SCAL-122

This drawing and the information contained herein is proprietary to Seachrome Corp. and shall not be reproduced, copied or disclosed in whole, or part, or used for manufacturing or for any other purpose without the written permission of Seachrome Corporation.

This information is subject to change without formal notice. If you need assistance, please contact Seachrome Corporation's technical support staff.