

SEACHROME

SEACHROME CORPORATION

Phone: (800) 955-2476

Fax: (800) 444-3380

www.seachrome.com

Description:

SCAL-189


Locking Surface Mount Dual Roll
Toilet Tissue Dispenser

Customer:

Customer Part #

05-29-2012

This drawing and the information contained herein is proprietary to Seachrome Corp. and shall not be reproduced, copied or disclosed in whole, or part, or used for manufacturing or for any other purpose without the written permission of Seachrome Corporation.

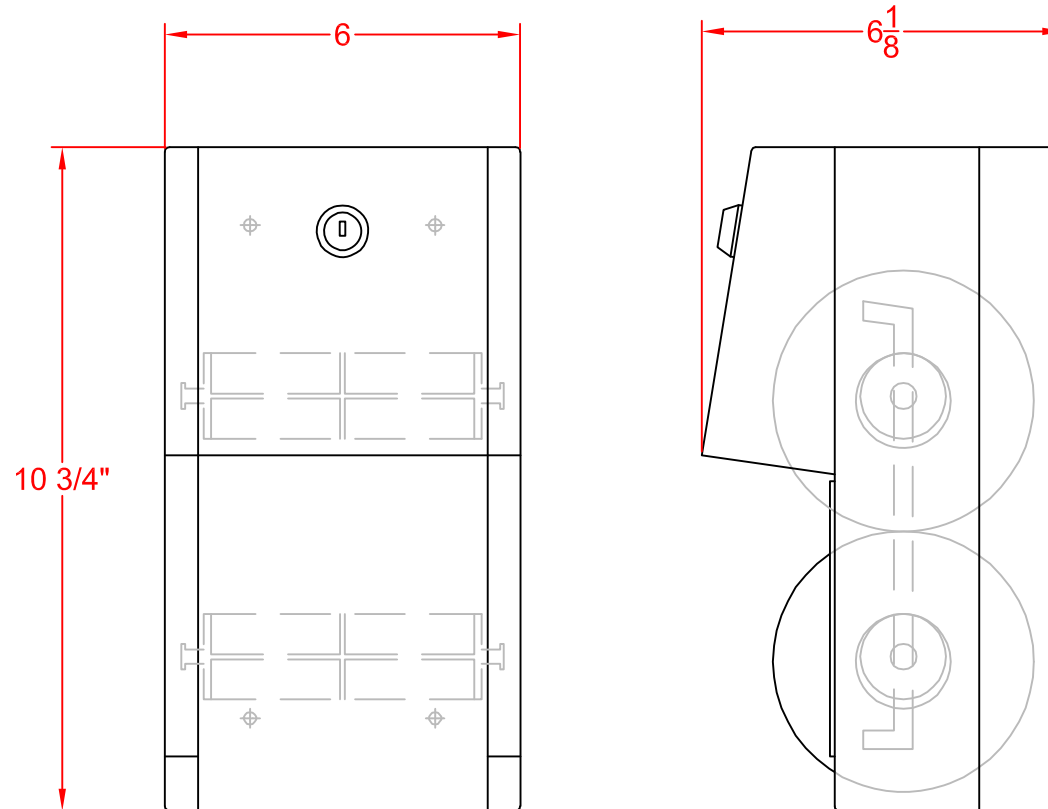

#304 Stainless Steel / Plastic Theft -Proof Spindles

Overall: 6"W x 10-3/4" H x 6-1/8"

Capacity: 2 Standard 5-1/2" Diameter Toilet Tissue Rolls.

This information is subject to change without formal notice. If you need assistance, please contact Seachrome Corporation's technical support staff.

SEACHROME

SEACHROME CORPORATION

Phone: (800) 955-2476

Fax: (800) 444-3380

www.seachrome.com

Description:


SCAL-189

Locking Surface Mount Dual Roll Toilet Tissue Dispenser

Customer:

Customer Part #

05-29-2012

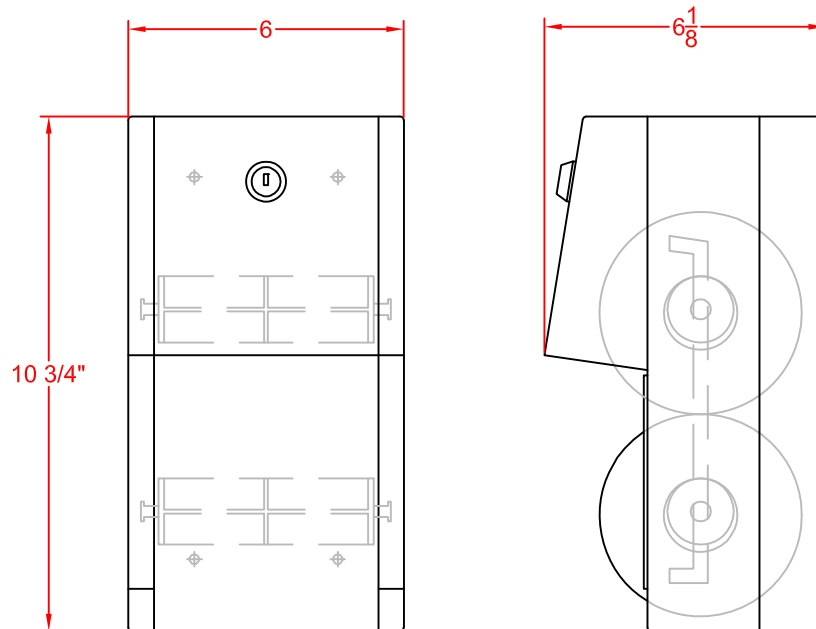

Specifications:

DETAILS:

Locking Surface Mounted Dual Roll Tissue Dispenser is fabricated of 22-gauge stainless steel with exposed surfaces in satin finish with welded construction.

SPINDLES: Molded Polyethylene

OPERATION: Cabinet holds 2 rolls of 4-1/2" x 5" standard core tissue, one above the other, auto drop down. Hinged door permits access to storage compartment for servicing of unit.

OVERALL SIZE: 6" Wide x 10-3/4" High x 6-1/8" Deep

CAPACITY: Holds (2) Standard core toilet tissue rolls 5" diameter.

ADA COMPLIANT: Consult local and national codes for proper installation guidelines.

This drawing and the information contained herein is proprietary to Seachrome Corp. and shall not be reproduced, copied or disclosed in whole, or part, or used for manufacturing or for any other purpose without the written permission of Seachrome Corporation.

Installation:

Provide an area on mounting surface at desired or specified location. Secure to wall at holes provided with mounting screws (not included). Provide in-wall backing at mounting screw locations.

