

SEACHROME

SEACHROME CORPORATION

Phone: (800) 955-2476

Fax: (800) 444-3380

www.seachrome.com

Description:

SCAL-169


Locking Wall-Mount Paper
Towel Dispenser / Waste Receptacle

Customer:

Customer Part #

05-29-2012

This drawing and the information contained herein is proprietary to Seachrome Corp. and shall not be reproduced, copied or disclosed in whole, or part, or used for manufacturing or for any other purpose without the written permission of Seachrome Corporation.

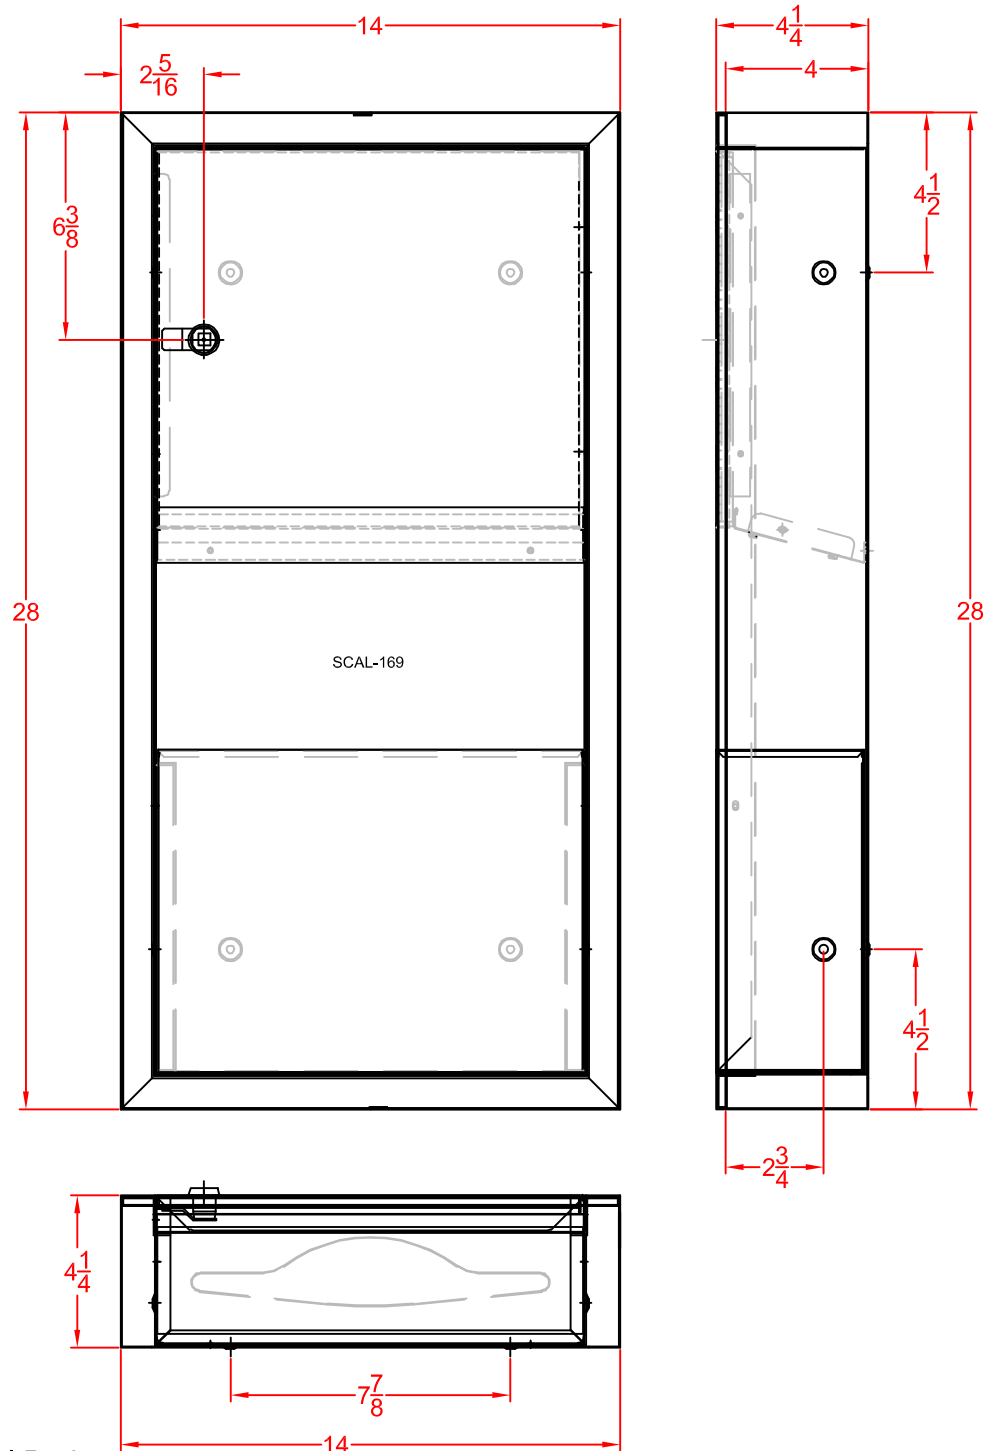

#304 Satin Stainless Steel Body
w/ Surface Mount Frame

Overall: 14" Wide x 28" High x 4-1/4" Deep.

Capacity: 350 C-Fold / 475 Multi-Fold Paper Towels

2 Gallon Receptacle

This information is subject to change without formal notice. If you need assistance, please contact Seachrome Corporation's technical support staff.

SEACHROME

SEACHROME CORPORATION

Phone: (800) 955-2476

Fax: (800) 444-3380

www.seachrome.com

Description:


SCAL-169

Locking Wall-Mount Paper
Towel Dispenser / Waste Receptacle

Customer:

Customer Part #

05-29-2012

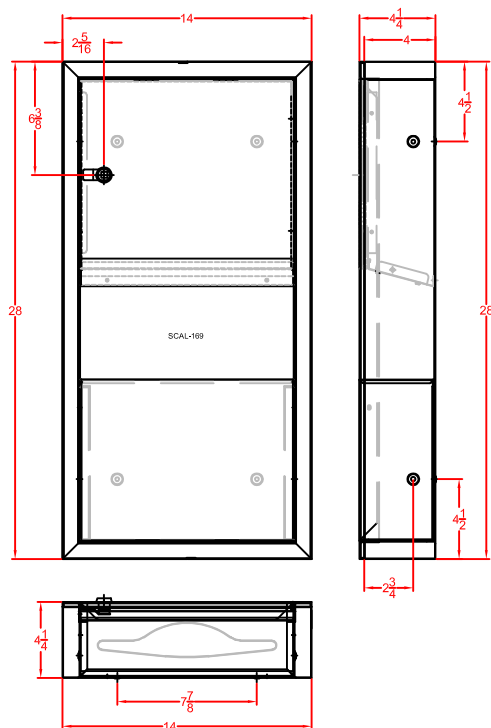

Specifications:

DETAILS:

Surface mount combination towel cabinet and waste receptacle is fabricated of stainless steel with exposed surfaces in satin finish. The cabinet door is constructed of 22 gauge stainless steel with full length hinge and secured with keyed lock. Removable 2 gallon waste receptacle.

OPERATION: Towel dispenser holds multi-fold or C-fold towels without use of special adapter. Waste receptacle is removable for easy servicing.

OVERALL SIZE: 14" Wide x 28" High x 4-1/4" Deep

CAPACITY: 350 C-Fold / 475 Multi-Fold Paper Towels. 2 gallon waste receptacle.

ADA COMPLIANT: Consult local and national codes for proper installation guidelines.

This drawing and the information contained herein is proprietary to Seachrome Corp. and shall not be reproduced, copied or disclosed in whole, or part, or used for manufacturing or for any other purpose without the written permission of Seachrome Corporation.

Installation:

Provide an area on mounting surface at desired or specified location. Secure to wall at holes provided with mounting screws (not included). Provide in-wall backing at mounting screw locations.

